

泰隆源便携式太阳能板

Tailongyuan portable solar panel

SFZD-20B SFZD-30B SFZD-40B

AIDPEK[®] 泰隆源 | 便携式太阳能板
Tailongyuan | portable solar panel



工作电压:18V

Working Voltage (V_{mp}) : 18V

开路电压:21V

Open Circuit Voltage(V_{oc}): 21V



DC 输出/DC Output



USB 输出/USB Output

- DC5521: 18V
- USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A, USB: 5V/2.4A

AIDPEK® 泰隆源 | 便携式太阳能板
Tailongyuan | portable solar panel

输出方式/Four kinds of Output Jacks

- DC 输出: DC5521: 18V USB 输出: USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A USB: 5V/2.4A
DC Output: DC5521: 18V USB Output: USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A USB: 5V/2.4A



DC 输出/DC Output



USB 输出/DC Output

可折叠面板/Foldable solar panel

折叠后的太阳能板，重量仅有0.98kg,单手可提动，携带更方便。

The folded solar panel weighs only 0.98kgs, can be lifted with one hand, making it more convenient to carry.



安全可靠/Safety Technology



过压保护

Over-Voltage protection



过流保护

Over-current protection



过载保护


Over-load Protection



细节展示/The details show



输出口
Output port

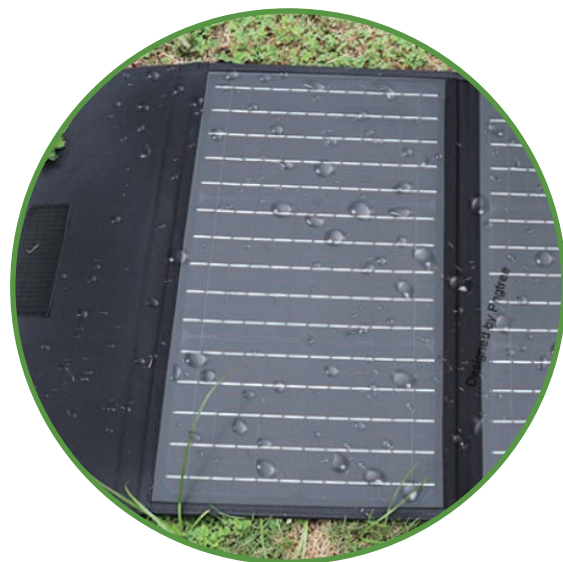

PTE 面板
PTE panel



PVC 面料+提手
PVC fabric+handle



内箱包装
Inner box packaging


稳定支架 | 随时调节角度

Stabilizing stand | Adjust the angle at any time




产品参数/Product parameters

型号 Model:	SFZD-20	SFZD-30B	SFZD-40B
峰值功率 Peak Power (Pmax):	20Wp	30Wp	40Wp
工作电压 Working Voltage (Vmp):	18V	18V	18V
工作电流 Working Current (Imp):	1.11A	1.67A	2.22A
开路电压 Open Circuit Voltage(Voc):	21V	21V	21V
短路电流 Short Circuit Current(Isc):	1.22A	1.83A	2.44A
电池片 Battery Plate:	单晶156.75 (Mon 156.75)	单晶156 (Mon 156)	单晶156(Mono 156)
温度范围 Temperature Range:	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C
接线盒输出 Output Connector:	DC5521: 18V USB (QC3.0): 5V/3.4A, 9V/2A, 12V/1.5A	DC5521: 18V USB (QC3.0): 5V/3.4A, 9V/2A, 12V/1.5A USB: 5V/2.4A	DC5521: 18V USB (QC3.0): 5V/3.4A, 9V/2A, 12V/1.5A USB: 5V/2.4A
折叠尺寸 Dimension folded:	350*200*35mm	350*200*35mm	405*350*35mm
展开尺寸 Power Indicator:	570*350*5mm	740*350*5mm	880*405*5mm
独立包装尺寸 Dimension:	370*240*50mm	360*320*50mm	415*385*50mm
净重 Net weight:	0.65Kg	1.45Kg	1.9Kg
毛重 Gross weight:	0.9Kg	1.7Kg	2.2Kg
外包装尺寸 Outer box size(L*W*H):	390*520*265mm	385*425*345mm	440*325*410mm
装箱数量 Packing quantity:	10个	8个	6个
整箱重量 Weight:	10Kg	14.6Kg	14.3Kg
配件 Package include:	1 x DC5521转接头 1 x DC线 1 x 说明书 (1 x Solar Panel, 1 x DC5521 Converter, 1 x DC cables, 1 x User manual)		

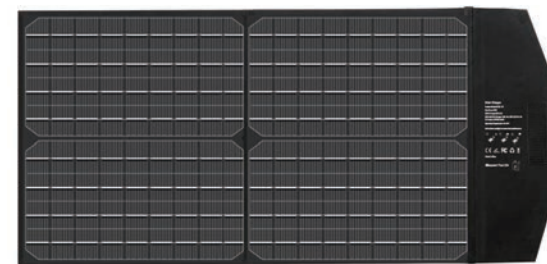

便携式太阳能/Solar Panel



说明书
User manual



DC线/DC Cable



DC5521转接头/DC5521 Converter

*技术参数参考，实际数据以出货产品为准。*The technical parameters may vary slightly. Please refer to the physical object.

搭配户外电源 | 永不断电

太阳能板可与储能电源搭配使用，白天用太阳能板给电源储充电，夜晚可给设备供电。储能电源配有AC、DC、USB、车充输出，满足户外用需求。

With outdoor power station | Never power off

Solar panels can be used in conjunction with Power stations, and solar panels are used to provide energy during the daytime. The devices can be charged at night. The power station is equipped with AC, DC, USB, car charger output, to meet the needs of outdoor use.





深圳市泰隆源科技有限公司/SHEN ZHEN TAI LONG YUAN TECHNOLOGY CO., LTD

地址：广东省深圳市宝安区新和大道丽城科技工业园Y栋4楼

Add: 4th Floor, Building Y, Licheng Technology Industrial Park, Xinhe Avenue, Shajing Street, Baoan District, Shenzhen, China

邮箱(E-mail): roger@tlytech.com

线下渠道合作(Offline channel cooperation): 13924860526

官网: <http://www.tlytech.com>