

泰隆源便携式太阳能板

Tailongyuan portable solar panel

SFZD-60B SFZD-80B SFZD-100B SFZD-120B

AIDPEK[®] 泰隆源 | 便携式太阳能板
Tailongyuan | portable solar panel



工作电压:18V

Working Voltage (Vmp) : 18V

开路电压:21V

Open Circuit Voltage(Voc): 21V



DC 输出/DC Output



USB 输出/USB Output

- DC5521: 18V
- USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A, USB: 5V/2.4A

输出方式/Four kinds of Output Jacks

- DC 输出: DC5521: 18V USB 输出: USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A USB: 5V/2.4A
USB输出: 5V/2.4A, 安德森输出, 鳄鱼夹

DC Output: DC5521: 18V USB Output: USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A USB: 5V/2.4A
USB Output: 5V/2.4A, Anderson Output, Alligator clip Output



DC 输出/DC Output



USB 输出/USB Output



安德森 输出/Anderson output



鳄鱼夹输出/Crocodile clip output



可折叠面板/Foldable solar panel

折叠后的太阳能板，重量仅有3.45kg,单手可提动，携带更方便。

The folded solar panel weighs only 3.45kgs, can be lifted with one hand, making it more convenient to carry.



安全可靠/Safety Technology



过压保护

Over-Voltage protection



过流保护

Over-current protection



过载保护


Over-load Protection



细节展示/The details show



输出口
Output port

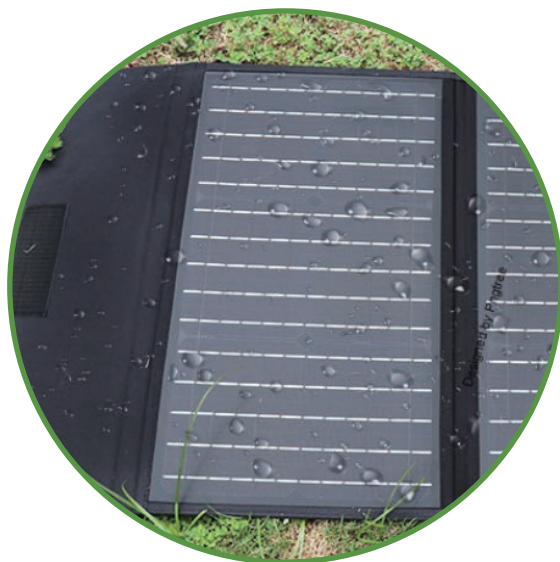

PTE 面板
PTE panel




PVC 面料+提手
PVC fabric+handle



内箱包装
Inner box packaging

稳定支架 | 随时调节角度


Stabilizing stand | Adjust the angle at any time

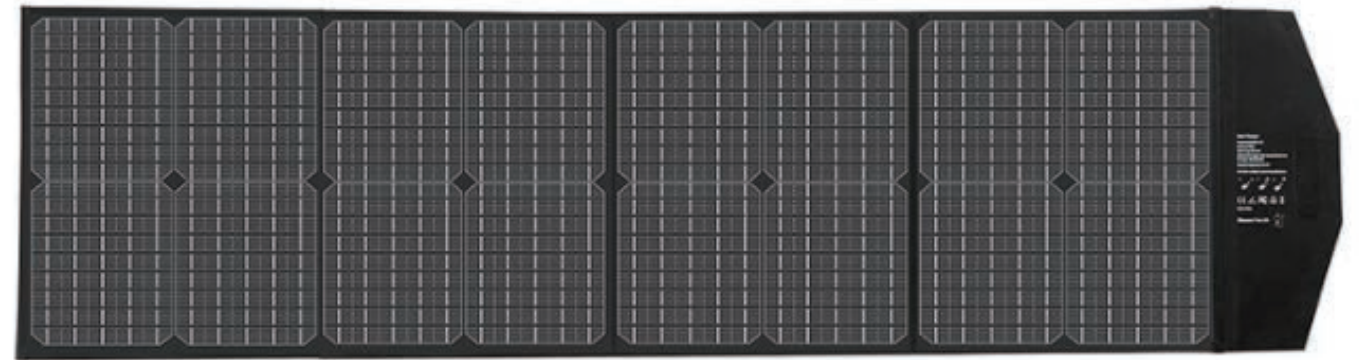

产品参数/Product parameters

型号 Model:	SFZD-60B	SFZD-80B	SFZD-100B	SFZD-120B
峰值功率 Peak Power (Pmax):	60Wp	80Wp	100Wp	120Wp
工作电压 Working Voltage (Vmp):	18V	18V	18V	18V
工作电流 Working Current (Imp):	3.33A	4.44A	5.56A	6.67A
开路电压 Open Circuit Voltage(Voc):	21V	21V	21V	21V
短路电流 Short Circuit Current(Isc):	3.67A	4.89A	6.11A	7.33A
电池片 Battery Plate:	单晶156 (Mono 156)	单晶156 (Mono 156)	单晶156 (Mono 156)	单晶156 (Mono 156)
温度范围 Temperature Range:	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C
接线盒输出 Output Connector:	DC5521: 18V, USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A, USB: 5V/2.4A			
折叠尺寸 Dimension folded:	405*350*40mm	405*350*45mm	528*350*45mm	528*350*45mm
展开尺寸 Power Indicator:	1250*405*5mm	1610*405*5mm	1605*528*5mm	1650*528*5mm
独立包装尺寸 Dimension:	415*385*55mm	415*385*60mm	550*390*55mm	550*390*55mm
净重 Net weight:	2.55Kg	3.2Kg	4Kg	4Kg
毛重 Gross weight:	2.85Kg	3.5Kg	4.3Kg	4.3Kg
外包装尺寸 Outer box size(L*W*H):	440*300*410mm	440*245*410mm	565*185*410mm	565*185*410mm
装箱数量 Packing quantity:	5个	4个	3个	3个
整箱重量 Weight:	15.4Kg	15.4Kg	14.3Kg	14.3Kg
配件 Package include:	DC5521转接头 DC线 鳄鱼夹 安德森接口 说明书 (Solar Panel, DC5521 Converter, DC cables, Anderson interface, Alligator clip, User manual)			

*技术参数参考，实际数据以出货产品为准。*The technical parameters may vary slightly. Please refer to the physical object.

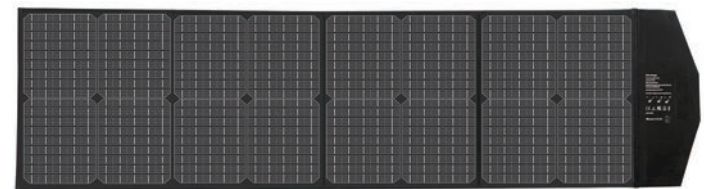

便携式太阳能/Solar Panel



DC5521转接头/DC5521 Converter



说明书/User manual



鳄鱼夹/Alligator clip



安德森接口
Anderson interface



DC线/DC cables

搭配户外电源 | 永不断电

太阳能板可与储能电源搭配使用，白天用太阳能板给电源储充电，夜晚可给设备供电。储能电源配有AC、DC、USB、车充输出，满足户外用需求。

With outdoor power station | Never power off

Solar panels can be used in conjunction with Power stations, and solar panels are used to provide energy during the daytime. The devices can be charged at night. The power station is equipped with AC, DC, USB, car charger output, to meet the needs of outdoor use.





深圳市泰隆源科技有限公司/SHEN ZHEN TAI LONG YUAN TECHNOLOGY CO., LTD

地址：广东省深圳市宝安区新和大道丽城科技工业园Y栋4楼

Add: 4th Floor, Building Y, Licheng Technology Industrial Park, Xinhe Avenue, Shajing Street, Baoan District, Shenzhen, China

邮箱(E-mail): roger@tlytech.com

线下渠道合作(Offline channel cooperation): 13924860526

官网: <http://www.tlytech.com>